



**GATOR XP OIL & GREASE REMOVER
FOR CONCRETE PAVERS, WETCAST & NATURAL STONES**


TDS Revision Date (dd/mm/yyyy): 03/02/2026



TECHNICAL DATA SHEET

- Update:** February 3, 2026
Make sure you have an updated data sheet on hand.
Canada and U.S. dial 1-855-847-7767 or (450) 624-1611
- Description:** **Gator Clean XP Oil and Grease Remover** easily removes tough stains such as motor oil, cooking oil & grease. Just shake the bottle, spread it on the stain, let it dry, and sweep it up. Use it on concrete pavers, wetcast & natural stones. Do not use on asphalt (blacktop). Not recommended for synthetic oil stains. **Gator Clean XP Oil and Grease Remover** is biodegradable and phosphate-free.
- Coverage:** • Approximately 6 square feet (.56 square meters).
- For use on:** Concrete pavers, wetcast & natural stones.
- Features:**
- Easily lifts & absorbs embedded oil stains as it dries from liquid to powder
 - Biodegradable and phosphate-free
 - No scrubbing
 - No rinsing
 - No mess
- Please note:**
- If applied on sealed pavers it may damage the seal.
 - Before using on sealed surfaces, always test the product on a small hidden area of approximately 4 square inches (26 sq. Cm.) To ensure the results will meet your expectations.
 - Not recommended for synthetic oil stains.
 - Do not use on wet surfaces. Use above 40°F (4°C) and provide maximum ventilation.

Application instructions:

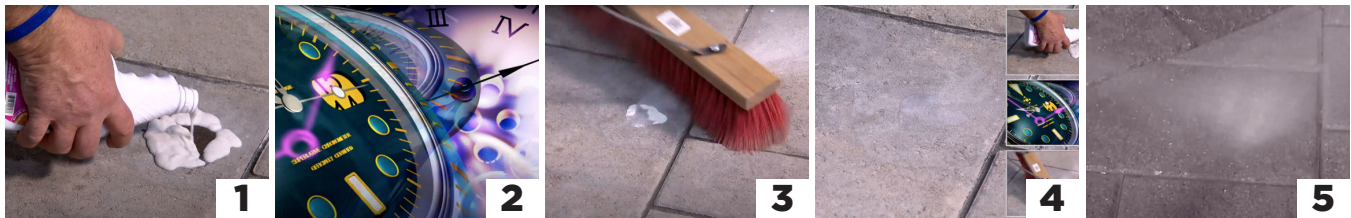

1. Shake bottle before applying to stain, extending 1" (25 mm) beyond perimeter of the stain. Coating thickness should be 1/8" (3 mm).
2. Allow to dry completely to powder. Wait 12 to 24 hours, depending on temperature, humidity and ventilation.
3. Sweep it up. If area still appears dark, provide adequate ventilation and allow moisture to evaporate.
4. If stain remains, reapply, scrub with hard bristled brush, and repeat steps 1 to 3.
5. Rinse off any remaining residue with water.





**GATOR XP OIL & GREASE REMOVER
FOR CONCRETE PAVERS, WETCAST & NATURAL STONES**

TDS Revision Date (dd/mm/yyyy): 03/02/2026

Page 2 of 2

33



WARRANTY :

Alliance Designer Products Inc. cannot guarantee results as it has no control over surface preparation and product application. If this product is proven to be defective, on the condition that it was applied pursuant to the required method of application and surface preparation, the sole obligation of Alliance Designer Products Inc. is to refund the purchase price. Proof of purchase is required for any claim. Alliance Designer Products Inc. shall not be liable for any other damages whatsoever, direct or consequential. To the extent permitted by law, Alliance Designer Products Inc. excludes any implied warranty of quality, merchantability or fitness for purpose.

*Please store container at above 32°F / 0°C.



1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.polybind.com - Email : info@polybind.com