




GATOR EDGE MINI

TDS Revision Date (dd/mm/yyyy): 09/02/2026

Page 1 of 1

20

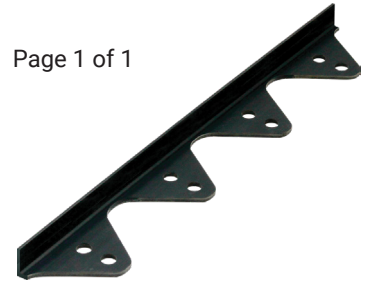

TECHNICAL DATA SHEET

Update:

February 9, 2026

Make sure you have an updated data sheet on hand.


Canada and U.S. dial **1-855-847-7767** or (450) 624-1611

Description:

GATOR EDGE MINI is made with 100 % Polyethylene. This will give it great strength as well as provide great flexibility. Paving Edge for natural stone and all types of slabs. It is easy to use and quick to install. **GATOR EDGE MINI** model is ideal for applications for up to 1" that can be used for all applications such as walkways, paths, patios etc.

Features:

- Easy-to-use
- 1" edge
- Versatile
- Robust system
- Support strength
- Come in 8-ft (2.44 m) lengths
- Use with [Gator Nails](#)
- Use [Gator Base Screws](#) for [Gator Base](#) applications



Ideal for:

- Helps define walkways, paths, patios etc.
- Thin pavers, slabs, wet cast and natural stone (1 1/2"-2" thickness (38-50 mm))
- Creating straight line edging, interior or exterior curves

Installation instructions:

1. It can be installed either before or after the paver, slab, wet cast or natural stone installation.
2. Ensure the **GATOR EDGE MINI** is sitting on 6" (15 cm) of compacted crushed stone and firmly installed against the selected paving unit.
3. Use one 10" nail every second hole and every junction for greater lateral strength support or use [Gator Base Screws](#) every second holes and junction when installed on an extended 6" (15 cm) [Gator Base](#) installation

Packaging:

Product

Gator Edge Mini

Unit Size

1 PIECE : 8 LINEAR FEET
1 PACK = 64 LINEAR FEET
1 BUNDLE = 24 PCS = 192 LINEAR FEET

Units per Pallet

16 BUNDLES = 3072 LINEAR FEET

[SEE THE INSTALLATION VIDEO
ON POLYBIND.COM](#)



1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.polybind.com - Email : info@polybind.com