




GATOR EDGE RIGID & FLEX

TDS Revision Date (dd/mm/yyyy): 09/02/2026

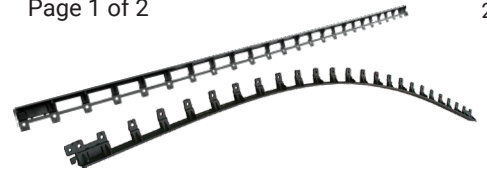

TECHNICAL DATA SHEET

Update:

February 9, 2026

Make sure you have an updated data sheet on hand.



Canada and U.S. dial 1-855-847-7767 or (450) 624-1611

Description:

Gator Edge Rigid & Flex are made with 100% Polypropylene Co-Polymer. This will give it great strength as well as provide great flexibility. We have a **Rigid** model which is ideal for straight applications and the **Flex** model that can be used for all curved applications such as walkways, paths, entrances etc. Both the **Rigid** and **Flex** can be locked together with the “**Twist & Lock**” system. Finally the **Rigid** could be transform in a partial **Flex** by cutting the bridge support between each triangular angles.

Features:

- The **Flex** can connect to the **Rigid**.
- Use a “**Twist & Lock**” connection system.
- Will not corrode.
- Easy-to-use.
- Available in **Flex** or **Rigid** edges.
- Xtra versatile.
- Xtra robust system.
- Xtra support strength.
- UV resistant.
- Comes in 8-ft lengths.
- Use with [Gator Nails](#).
- Use [Gator Base Screws](#) in [Gator Base](#) application.

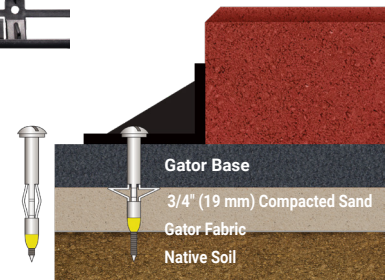

For use on:

GATOR EDGE is an excellent choice to help define alleys, driveways or sidewalks. **GATOR EDGE** is designed for straight or curved installation. It is especially easy to use and quick to install.

INSTALLATION INSTRUCTIONS:

- Step 1** It can be installed either before or after the paver installation.
- Step 2** Use **10" Gator Nail**. Use one 10" Gator Nail every second hole and at every “**Twist & Lock**” junction, this will ensure continuous lateral support. Ensure edges are installed firmly against the pavers on a minimal compacted structural aggregate base of 6" (15 cm) deeper and wider on all sides than the paved area.
- Step 3** Using **Gator Base Screws**. When using [Gator Base](#), use [Gator Base Screws](#) at every second hole and every “**Twist & Lock**” junction to ensure continuous lateral support. Ensure edges are installed firmly against the pavers. The [Gator Base](#) must be 6" (15 cm) wider on all sides than the paved area.

Packaging:

Product

Gator Edge Flex

- 1 piece = 8 linear feet
- 1 Mini-pack = 6 pieces = 48 linear feet
- 1 Master-pack = 4 Mini-packs = 192 linear feet
- 1 pallet = 28 Master-packs = 5,376 linear feet

Gator Edge Rigid





- 1 piece = 8 linear feet
- 1 Mini-pack = 6 pieces = 48 linear feet
- 1 Master-pack = 4 Mini-packs = 192 linear feet
- 1 pallet = 28 Master-packs = 5,376 linear feet





GATOR EDGE RIGID & FLEX


TDS Revision Date (dd/mm/yyyy): 09/02/2026

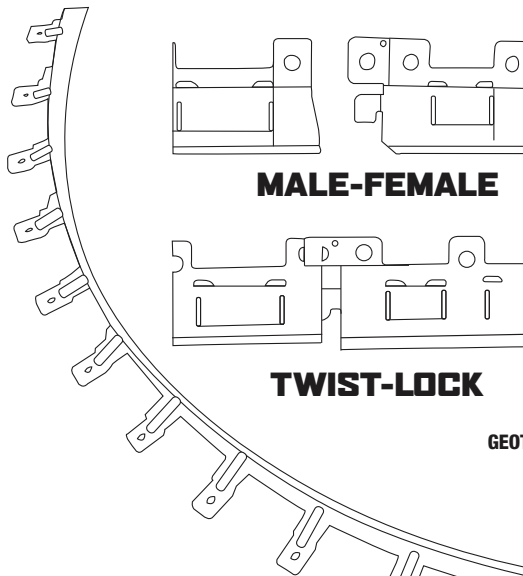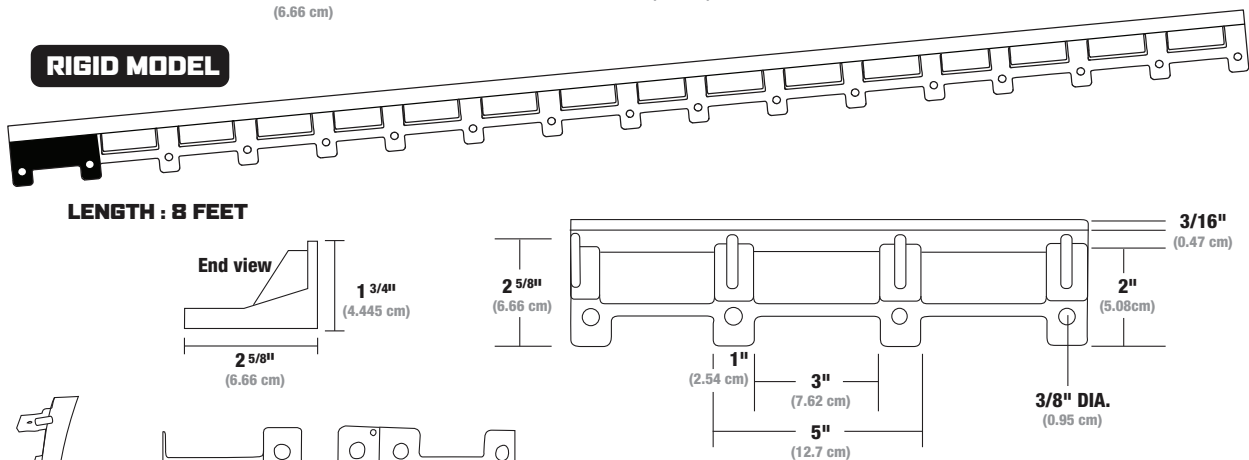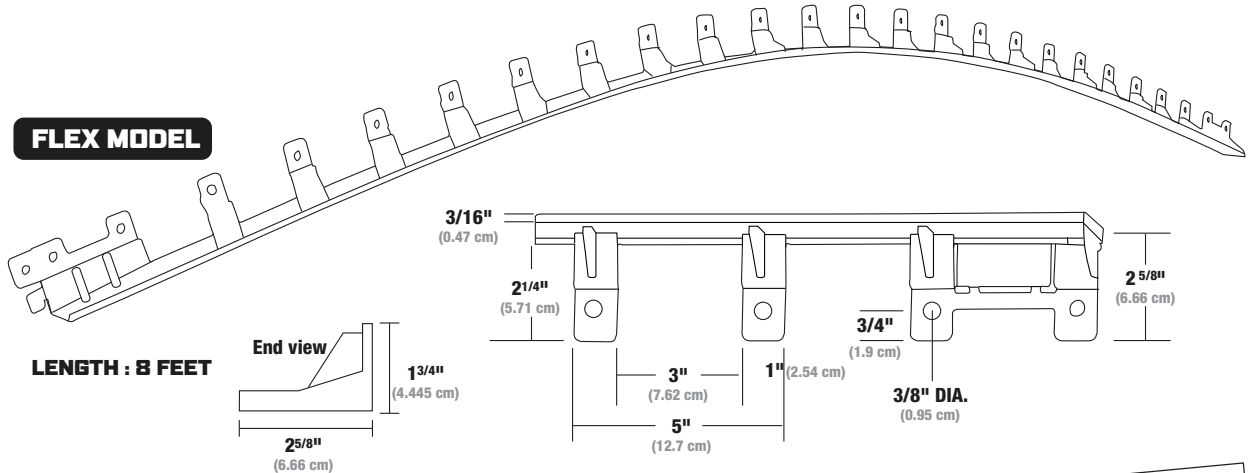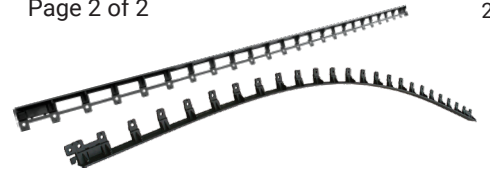

BEDDING SAND
maximum of 1 inch (2.5 cm)

POLYMERIC SAND

Gator Edge is:
• Height 1 3/4"
• Width 2 5/8"
• Length 8'

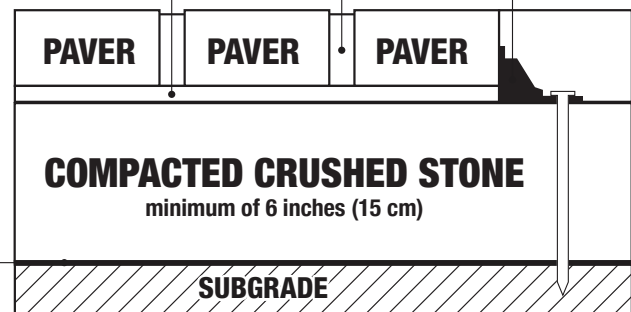

GATOR EDGE FLEX CAN CONNECT TO GATOR EDGE RIGID

SEE THE INSTALLATION VIDEO
ON ALLIANCEGATOR.COM



1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.polybind.com - Email : info@polybind.com

