

GATOR SPACER 1/8" (3.2 mm), 3/16" (4.8 mm) and 1/4" (6.4 mm)
TDS Revision Date (dd/mm/yyyy): 09/02/2026


TECHNICAL DATA SHEET

Update: February 9, 2026
Make sure you have an updated data sheet on hand.
Canada and U.S. dial **1-855-847-7767** or (450) 624-1611


Description: The creation of the Gator Tile System allows for the installation of porcelain tile directly on top of the [Gator Base](#) using the **GATOR SPACER** to provide uniform spacing and unparalleled stability. The **GATOR SPACER** has been designed to provide the right support, load transfer and a monolithic surface binding all units together with the help of the [GATOR BLOCK BOND](#).

Ideal for: Exterior porcelain tile Installations.


- Features:**
- Provides uniform spacing
 - Alignment with horizontal and vertical stability
 - The Gator Spacer disk can be cut into either a half or a quarter-unit
 - Gator Spacer bar's can be removed to obtain a flat disk, when spacer is needed on larger porcelain tile..
 - Gator Spacer's are offered in 3 different joints sizes : Blue 1/8" (3.2mm), Grey 3/16" (4.8mm) and Black 1/4" (6.4mm)

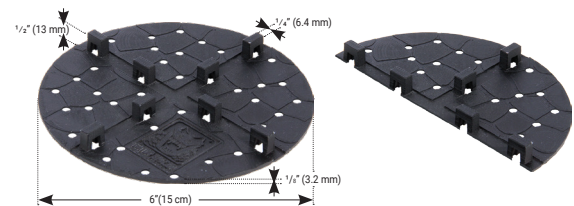


Calculator: How many Gator Spacer are needed according to the tile sizes?




16"x 16" (40 x 40 cm) tiles
18"x 18" (46 x 46 cm) tiles
20"x 20" (50 x 50 cm) tiles
24"x 24" (60 x 60 cm) tiles
sq.ft. x 0.4 = number of spacers
(m² x 4.3 = number of spacers)

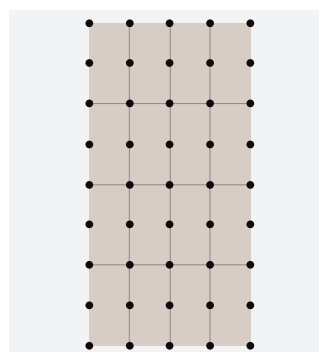

24"x 48" (60 x 120 cm) tiles
sq.ft. x 0.35 = number of spacers
(m² x 3.77 = number of spacers)

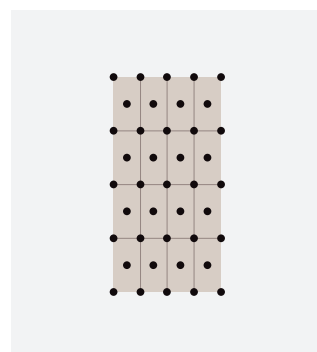

16"x 32" (40 x 80 cm) tiles
sq.ft. x 0.75 = number of spacers
(m² x 8 = number of spacers)

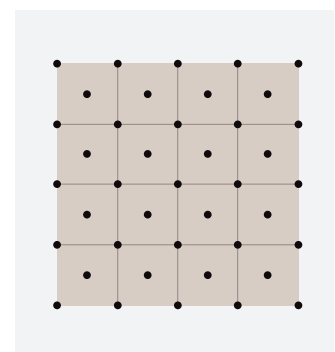

36"x 36" (80 x 80 cm) tiles
sq.ft. x 0.29 = number of spacers
(m² x 6 = number of spacers)

Packaging:	Product	Joint Size	Unit per pack	Packs per box
	GATOR SPACER	1/4" (6.4 mm)	50	6
	GATOR SPACER	3/16" (4.8 mm)	50	6
	GATOR SPACER	1/8" (3.2 mm)	50	6



1800 Berlier st., suite 200, Laval, Quebec, Canada H7L 4S4
Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
www.polybind.com - Email : info@polybind.com